WPCLF 2025-26

Group	Address	Street	Township	System Type	Funding	Homeowner
#7	810	Maple Street	Columbiana City	NPDES +	100%	0%

Columbiana County Health District

Columbiana County Health District

P.O. Box 309 – 7360 State Route 45 – Lisbon, Ohio 44432
Phone: 330-424-0272 – **General Fax:** 330-424-1733 – **Nursing Fax:** 330-424-1843
Email: cchd@columbiana-health.org **Web:** www.columbiana-health.org

ACCREDITED HEALTH DEPARTMENT · PHAB Advancing public health performance · PUBLIC HEALTH ACCREDITATION BOARD
Awarded 2022

☐ Application for Site Review **Fee: $285** ☐ Application for a Soil Evaluation **Fee: $595** ☐ Both **Fee: $880**

Site Address: 810 Maple St. Parcel #: 18-02055.000 Township: Columbiana FA

Lot Number/Subdivision Name: _____ Lot Size: _____ No. of Bedrooms: 1

Applicant's Name: Priscilla McLaughlin Mailing Address: same

City: Columbiana State: OH Zip: 44408 Date: 9-6-23

Contact Name: Priscilla McLaughlin Contact Phone: 330-853-1543

FOR HEALTH DEPARTMENT USE ONLY

Soil Data Soil Evaluator: _____ Date: _____ Test Hole(s): _____

Primary Treatment

Septic Tank *total volume required*: ___ 1000gal ___ 1500gal ___ 2000gal ___ 2500gal ___ other: _____

Pretreatment Unit: ☐ 1ft depth credit ☐ 2ft depth credit ☒ NPDES System

Secondary Treatment

Slope: _____% Infiltrative Distance: _____inches ILR: _____ LLR: _____ Table Location: _____

Estimated Flow: _____GPD Minimum Sq.Ft. of Absorptive Area: _____ Minimum Length: _____

Depth to limiting layer_____ Type_____ Required VSD _____

Drain

☐ Inceptor ☐ Curtain ☐ Engineered Drain Depth: _____ ☐ Diversion Swale

Comments:

All plumb tied into septic.

No discharge point - need discharge field - See attached septic system attached per code.

THIS IS NOT A PERMIT TO INSTALL: NO PERMIT WILL BE ISSUED UNTIL AN APPROVED DESIGN PLAN, HOUSE PLANS AND A TAX MAP OF THE PROPERTY IS SUBMITTED, IF APPLICABLE.

☐ **APPROVED-** Adequate length/width is available for a Sewage Treatment System.

☐ Based on the information submitted, it cannot be determined if the lot is suitable for a Sewage Treatment System, see comments for additional needed information.

☒ Based on the information submitted, this lot is not suitable for an on-lot Sewage Treatment System. NPDES permit is required from the OEPA for approval of an off-lot discharging system.

☐ **DISAPPROVED-** This property is not suitable for a Sewage Treatment System.

Site Evaluated By: _____ Date: 11/21/25

update- 10/8/26

Our Vision: "A safe community of healthy people"

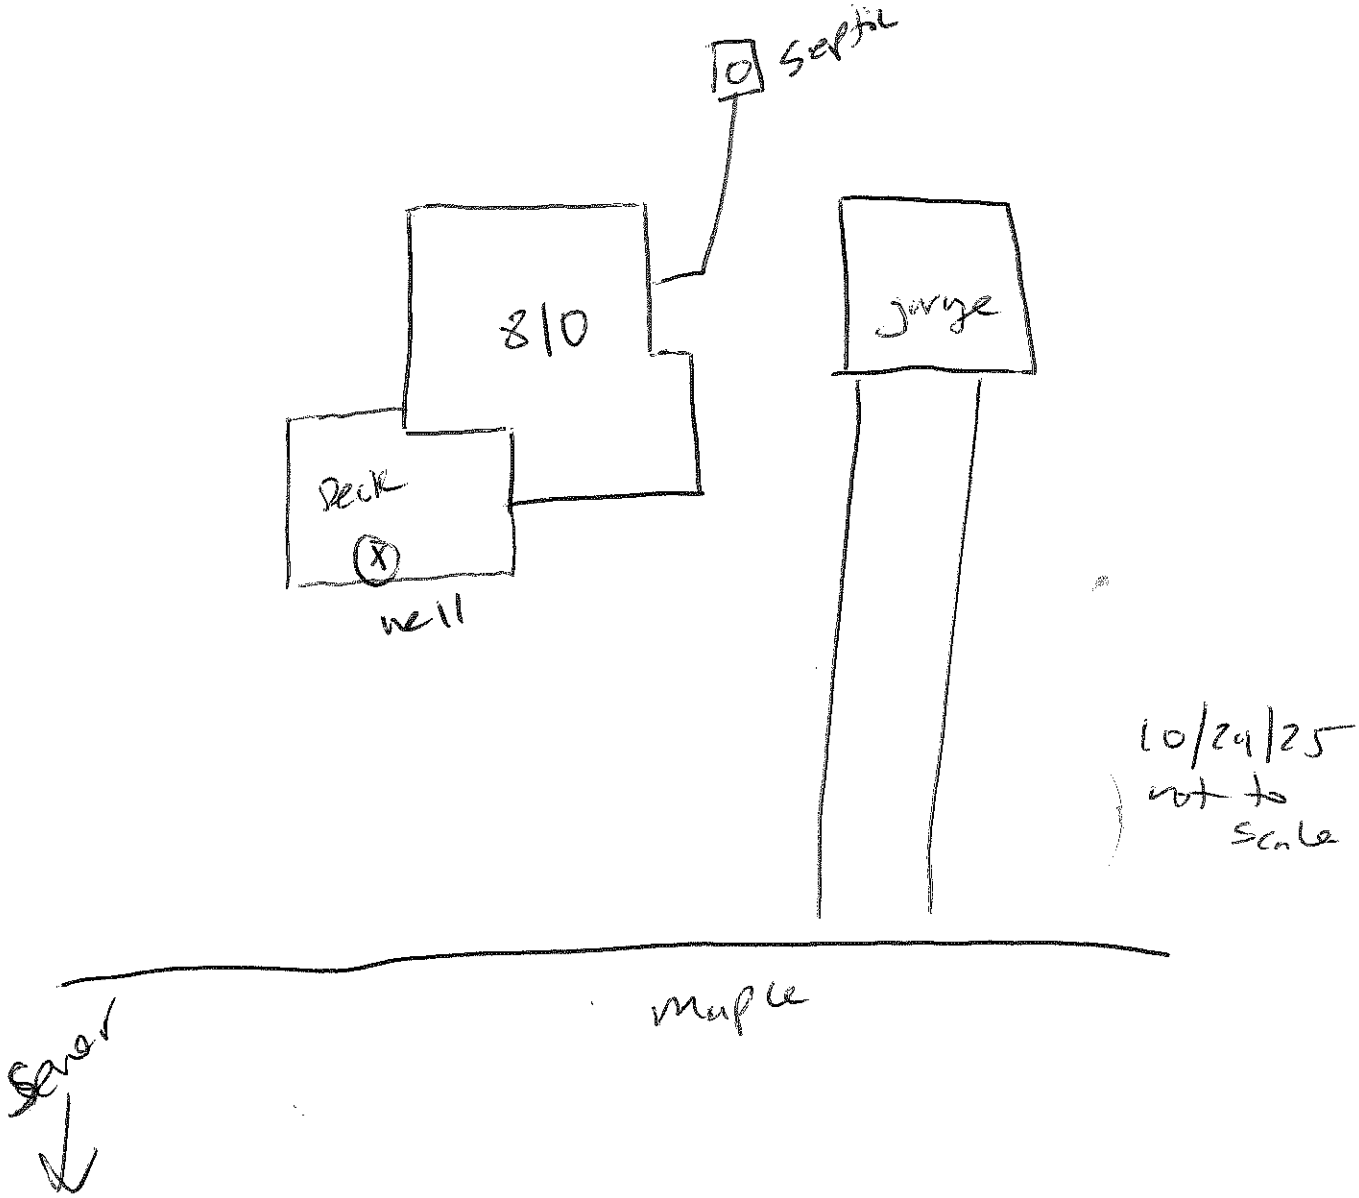
septic
810
Jorge
Deck
well
10/29/25
not to
scale
maple
sewer

Great Lakes COMMUNITY ACTION PARTNERSHIP

RCAP

February 10, 2026

Priscilla McLaughlin
810 Maple Street
Columbiana, Ohio 44408

Dear Priscilla,

Thank you for your interest in the Columbiana County Septic Program. After reviewing your application, income, and ownership eligibility on behalf of the Columbiana County Health Department, we have determined you to be eligible for the Septic Program.

Based on your income and program requirements, it will be your responsibility to contribute the following amount toward the completion of the project:

__X___ No contribution required based on income below 100% of the federal poverty guidelines.

_____ 15% of the total project costs based on income between 100-200% of the federal poverty guidelines.

_____ 50% of the total project costs based on income between 200-300% of the federal poverty guidelines.

We will be forwarding your application to the Columbiana County Health Department so they can finish the process for the Septic System Program.

If you have any questions, please feel free to contact Laura Fauss at 330-424-0272.

Thank you for your participation in this program.

Sincerely,

Cindy Brookes

Cindy Brookes
Sr. Rural Development Specialist

810 Maple St., Columbiana – Septic install

- An NPDES approved aeration system must run into a discharge field then discharge in a surface gravel pit on this parcel. See diagram
    - 4- 30'x2' leach lines 15" deep- Pipe and gravel or chambers are acceptable
    - 4 drop boxes to be installed at each line for distribution
    - Discharge line will feed from the 4th drop box when all lines have been filled
    - Discharge line will be 4" perforated PVC, the pipe and 2' past the daylighted outlet will be graveled (gravel pit 3' long x2' wide 4" deep).
- NPDES permit required $200 fee to be paid to OEPA
- Bid must include a 5 year service contract for the aeration system

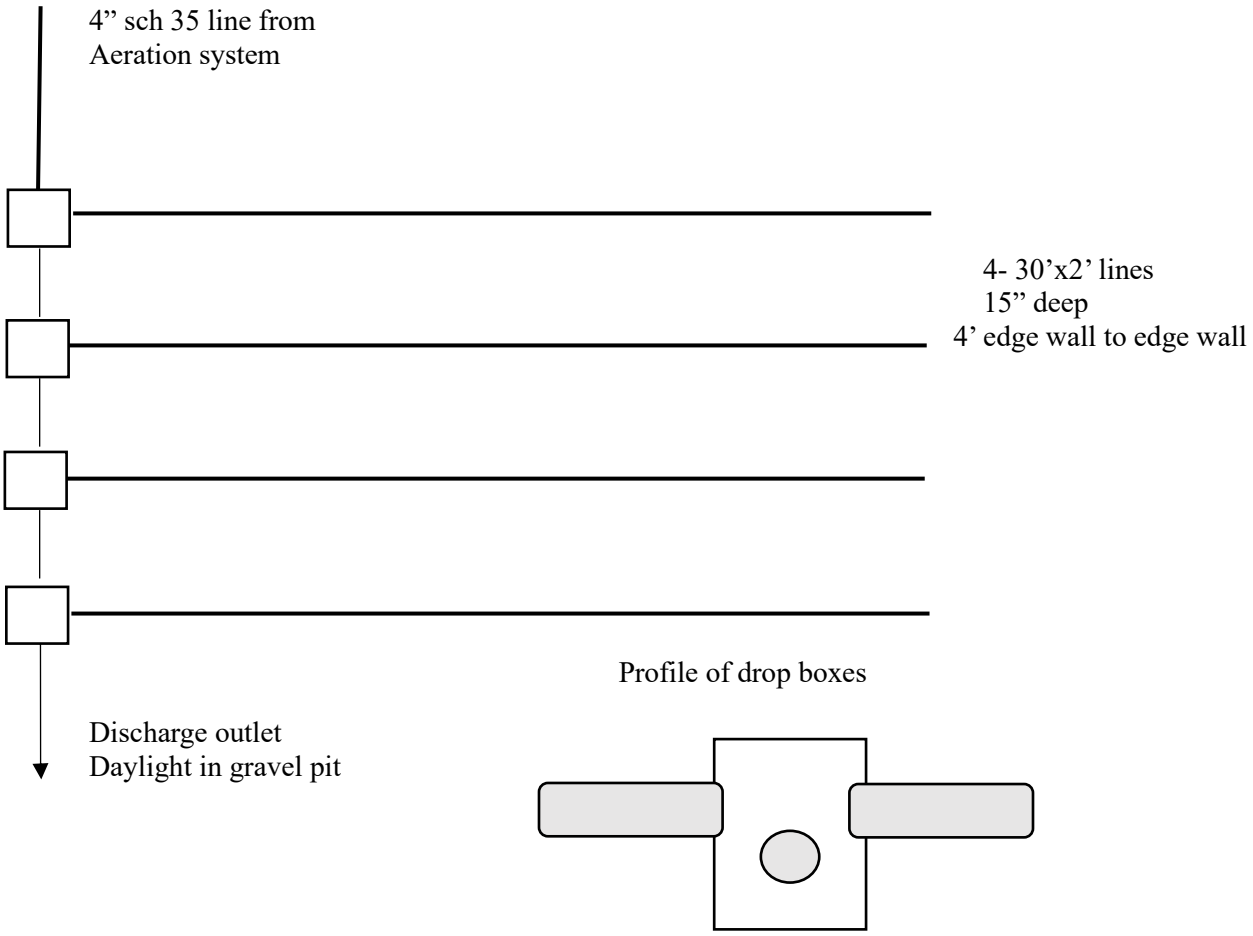

18-01191.000
Water Well
18-02055.000
Existing Tank
Discharge Field
18-01190.000
Discharge line with gravel pit outlet
18-02054.000